


# Bay Window Classic Bike Shed Measuring Guide

2021 EDITION

BRIGHTON  
**BIKE SHEDS**  
HAND MADE IN ENGLAND

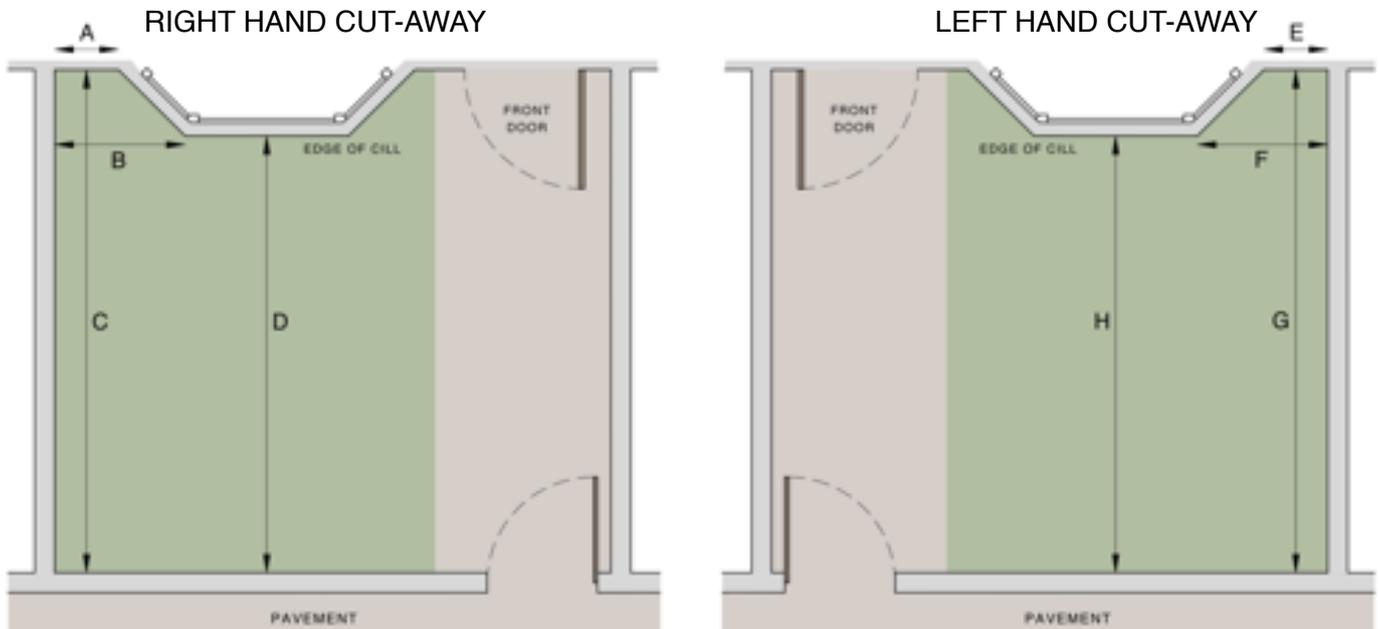

1. PLEASE RECORD DIMENSIONS **A,B,C** AND **D** IF YOUR BIKE SHED IS TO HAVE A **CUT-AWAY** ON ITS **RIGHT HAND SIDE** (LOOKING AT THE SHED FRONT ON)
2. PLEASE RECORD DIMENSIONS **E,F,G** AND **H** IF YOUR BIKE SHED IS TO HAVE A **CUT-AWAY** ON ITS **LEFT HAND SIDE** (LOOKING AT THE SHED FRONT ON)
3. THE DIMENSIONS YOU PROVIDE US WILL THEN HAVE 50MM TOLERANCES ADDED TO PROVIDE WIGGLE ROOM ON SITE
4. MAKE SURE THE DIMENSIONS ARE TAKEN **FROM THE EDGE OF** ANY PROTRUSIONS SUCH AS WINDOW SILL EDGES, CAP STONES ON TOP OF PILLARS ETC. MASONRY CANNOT BE MOVED ON INSTALLATION THAT MEANS THE SHED HAS TO BE ADAPTED ON SITE WHICH WILL INCUR ADDITIONAL COST. PLEASE MAKE EXTRA CARE **NOT TO MEASURE FROM BELOW** WINDOW CILLS/LEDGES.
5. DIMENSIONS 'B' AND 'F' ARE THE **DEPTH** OF THE SHED AND THEREBY THE NUMBER OF BIKES. EG IF 'B' IS 1000MM THEN A 3-BIKE CLASSIC SHOULD BE ORDERED.
6. IF DIMENSIONS 'C' OR 'G' ARE > 2.5M PLEASE EMAIL US A BESPOKE ORDER. IF THEY ARE < 2.5M THIS ORDER CAN BE PLACED AS A **STANDARD BAY CLASSIC** ONLINE
7. PLEASE SEND US YOUR DIMENSIONS PLUS A FEW PHOTOS OF THE SITE SO THAT WE CAN ASSESS IT PRIOR TO THE INSTALLATION

## Past example of LEFT HAND cut-away on a bay window shed base and construction images.

The top row of images show a good fitting base, note the cut away is parallel to the sill but well clear of it too on the vertical axis.

The client sent the dimensions E, F, G and H - **up to** the masonry obstructions (note on first image there is a triangular bevel in bottom right). We then deducted 50mm tolerances.

The lower row of images show the roof construction, internal wall construction, and the finished

